


GNT-P9828V6

GNT-P9828V6 8p 2Up-Link 250m AI Hybrid PoE Switch Genata

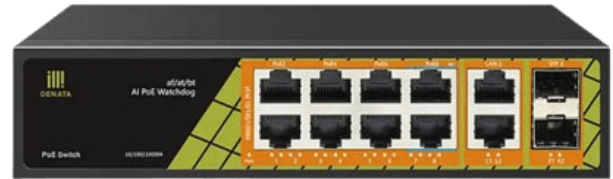

Model	GNT-P9828V6
Brend	Genata
PoE gücü	120 W
Port sayı	8 Port
PoE	PoE
Port sürati	100mb/s

Specification

DATA SHEET	
Port	2*100Mbps Uplink ports +8*100Mbps PoE ports
Transmission Rate	2000Mbps Full Duplex; 10 or 100 or 1000Mbps Half Duplex
Max transmission distance	130m
Power support	Power input: AC 110~220V Totals120W PoE Watchdog: Port 1-8 Power output: PoE1~6Port:1/2(+52V),3/6(GND)≤30W PoE7~8Port:1245(+53V),3678(GND) compatible1/2(+52V),3/6(GND)≤60W
Ports(1-6)Support	IEEE 802.3af/at protocol
Ports(7-8)Support	IEEE 802.3af/at/bt protocol
Performance Specification	Bandwidth: 2 Gbps Network Latency (10 to 1000Mbps): ≤16μs (use the 64byte package size) MAC address table: 2K The Frame Filter & Transmission Rate: 14800pps the most for 10M port, 148800pps the most for 100M port,1488000pps the most for 1000M port
Networking Standard	IEEE 802.3i 10BASE-T IEEE 802.3u 100BASE-TX/ IEEE 802.3ab 1000BASE-T IEEE 802.3xFlowControl

IEEE 802.3af/at/bt Power over Ethernet	
Protection Level	Lightning Protection:6KV, Per: IEC61000-4-5
	ESD Protection:8KV, Per: IEC61000-4-2
Physical Specifications	Size(L*W*H): 187mm*139mm*43mm
Working Environment	Operating Temperature: -30~ ~60
	Storage Temperature: -40~ ~70
	Operating Humidity: 10%~90% non-condensing
	Storage Humidity: 5%~90% non-condensing
Electromagnetic Compatibility	CE mark
	FCC Part15:Class B
	VCCI Class BEN5022 (CISPR 22)
	C-Tick
Other Functions	Short-circuit protection
	Over-Temperature protection
	Preventing surge
Package Content	AC Power Cable:Installation Manual